



## 1200 SERIES EXIT DEVICE



Jackson's 1200 Series Exit device blends the reliability of our time-proven 10 Series crossbar device with the sleek, contemporary style of today's push-pad exit device. Available as both a Rim and Concealed Vertical Rod Device, the 1200 Series is designed to be both aesthetically pleasing and provide years of reliable, maintenance free operation.

### TECHNICAL INFORMATION

#### FEATURES

- Available as Rim and Concealed Vertical Rod devices.
- "Soft Touch" smooth action push pad.
- Easy access dogging system.
- Optional Cylinder Dogging.
- Available with key controlled and matching inactive outside trim.
- Durable external and internal components for long lasting dependable service.
- Easy to retrofit existing Jackson 10 Series CVR devices.
- Quick and simple installation
- Field sizeable.
- Audible Alarm Package available
- Optional Signage Push Pad for custom messaging.


#### MATERIALS

- Base Extrusion.....Extruded Aluminum
- Push Pad.....Extruded Aluminum
- End Caps.....Black High-impact thermoplastic
- Mechanical Components.Steel
- Top and Bottom Bolts.....Steel
- Rim Latch.....Sintered Steel
- Strikes.....Sintered Steel

#### FINISH

- Standard Anodized Finish: DBZ 313 - Dark Bronze
- US28/628 - Satin Aluminum


### DIMENSIONS - Inch (Metric)

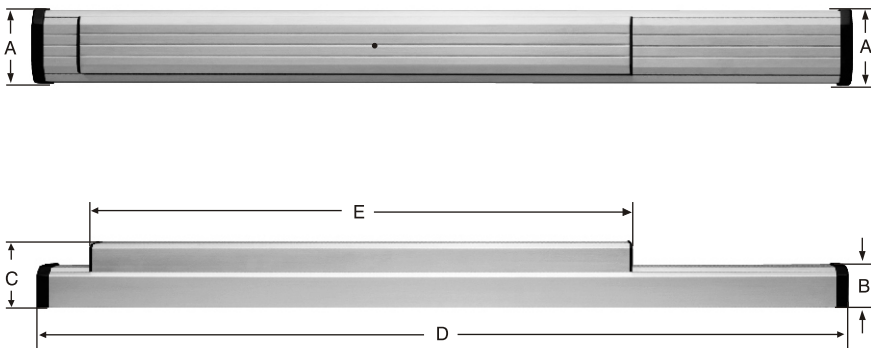

Description	inches	mm
A = Base Height	3-3/16	81
B = Base Projection	1-9/16	40
C = Overall Projection	2-13/16	71
D = Overall Length	Varies with door size	
E = Touch Pad Length	3/0 =24	610
	4/0-2 =24	610



## 1200 SERIES EXIT DEVICE



### 1285 CONCEALED VERTICAL ROD

#### APPLICATION

- Narrow 1-3/4" (45 mm), Medium and Wide Stile Aluminum Doors.
- Product is shipped for use with standard 1-3/4" (45 mm) Thick Doors - 2" (51 mm) Door Mounting is optional.

#### FEATURES

- Concealed Vertical Rod features top and bottom bolt design.
- Independent top and bottom bolt action 5/8" (15 mm) bolt throw.
- Trigger action, positive bolt throw.
- Adjustable bolt guides allow bolt adjustment with door installed.
- Handed – Not Reversible.
- Requires No. 30-821J Cylinder mounting pad when using mortise cylinder for keyed entry.

- Uses standard mortise cylinder with maximum security (MS) type cam. (Supplied by Others)
- Foam rubber washers to help quiet rod operation.
- Standard mounting package consists of machine screw type fasteners.
- Pushpad Center Line mounting height = 40" (1016 mm) from door bottom.
- Rod length shipped standard for 7/0 (2134 mm) high doors.  
For doors over 7/0 (2134 mm) High:
  - Top Rod Extender - 12" (305 mm). . . . .No. 30-1347
  - Top Rod Extender - 24" (609 mm). . . . .No. 30-1348
- Top & Bottom Bolt . . . . . No. 30-763P
- Top & Bottom Strikes . . . . .No. 30-1084

### 1295 RIM EXIT DEVICE



#### APPLICATION

- Aluminum, Wood or Hollow Metal Doors.

#### FEATURES

- Rim device features 3/4" (19 mm) throw latchbolt.
- Non-Handed
- Uses standard rim cylinder for keyed entry - mounting pad not necessary. (Cylinder supplied by Others)
- Strike Options:
  - Surface Mounted Strike - Type "C" (Standard) . . . . .No. 30-2436
  - Surface Mounted for use with applied or blade stop - Type "S" . . . . . No. 30-2501
  - Strike Plate for 1-3/4" (45 mm) Stile Doors or Mortised Strike . . . . . No. 30-2519
- Field Sizeable.
  - Door Widths: 28 - 48 Inches (711 - 1219 mm)
  - Door Heights: 1275 - 80 Inches (2032 mm) - 120 Inches (3048 mm)



## 1200 SERIES EXIT DEVICE



### 1206 MID PANEL

#### APPLICATION

- For 1-3/4" (44.5mm) Narrow, Medium and Wide Stile Aluminum Doors.
- Product is shipped for use with standard 1-3/4" (44.5 mm) Thick Doors - 2" (51 mm) Door Mounting is optional

#### FEATURES

- Handed - Not Reversible
- Available with Top Pullman Latch Design
- Concealed fastening for complete security
- Standard hex key dogging
- Dual dogging feature
  - By outside cylinder
  - By standard hex key dogging Outside Trim.
- Minimum pressure anywhere along push pad will activate device.
- Push pad mounting height centerline at 40" from bottom of door.
- UL listed for Panic Hardware

#### MATERIALS

- Base Extrusion.....Extruded Aluminum
- Filler Panel..... Extruded Aluminum
- Push Pad.....Extruded Aluminum
- Mechanical Components Stainless & Hardened Steel
- Top Latch.....Sintered Steel
- Strikes.....Steel

#### FINISH

- Standard Anodized Finish: DBZ 313 - Dark Bronze
- US28/628 - Satin Aluminum



### 1275 SURFACE VERTICAL ROD



#### APPLICATION

- The 1275 model is an Surface Vertical Rod device suitable for wood or Metal Doors.

#### FEATURES

- Non-Handed
- Field Sizeable.
  - Door Widths: 28 - 48 Inches (711 - 1219 mm)
  - Door Heights: 1275 - 80 Inches (2032 mm) - 120 Inches (3048 mm)
- Touchbar mounting height centerline at 40 Inches (1016 mm) from bottom of door.
- Completely covered active surface rods for increased security.
- Top Latch & Strike - A specially engineered Jackson C-Top Latch and latch-mating strikes designed for increased safety and security.
- Bottom Latch & Strike - designed to use a pullman-type bottom latch and appropriate strike.



# 1200 SERIES EXIT DEVICE

## ACCESSORIES



For Doors Over 7'0 (2134 mm) High:  
Top Rod Extender - 12" (305 mm) . . . No. 30-1347  
Top Rod Extender - 24" (609 mm) . . . No. 30-1348

Top & Bottom Bolt -1285  
No. 30-763P




Mortise Cylinder  
Mounting Pad




No. 30-821J


Alarm Unit  
No. 30-2170

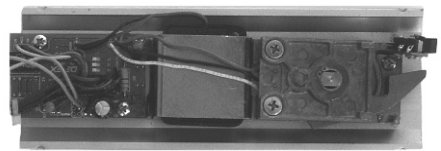

Top & Bottom Strikes - 1285  
No. 30-1084



Bottom





Top

Signal Switch Kit No. 30-2861



Adjustable  
Top & Bottom  
bolt guides



Top = No. 30-934  
Bottom = No. 30-320

### Rim Strike Options - 1295


Surface Mounted  
Strike - Type "C" (Standard)

No. 30-2436



Surface Mounted  
for use with applied or  
blade stop - Type "S"

No. 30-2501



Strike Plate for Mortise  
Strike - Type "A"

No. 30-2519



Top Bolt Trip 2086

No. 30-824



Concealed Vertical  
Rod Silencers

No. 30-1552



10 Series to 12 Series  
Retrofit Kit  
No. 30-2513