


The NGP logo consists of the letters "NGP" in a bold, blue, sans-serif font. The letters are contained within a white rectangular box with slightly rounded corners. This box is centered within a larger blue square background.

# 327

Aluminum  
Half- Saddle Threshold  
 $\frac{1}{2}$ " x 4"



- ▶ Aluminum Alloy 6063, T5 Temper
- ▶ 4" Wide x  $\frac{1}{2}$ " Tall
- ▶ Fluted Top
- ▶ BHMA Certified to ANSI/BHMA A156.21 1,000 Lb. Load Test
- ▶ Typical Wall Thickness: .110"
- ▶ Weight: .60 Lbs./Ft.
- ▶ #10 x  $1\frac{1}{2}$ " FH Zinc Plated Wood Screws Included



**BHMA**  
CERTIFIED

*\* When Installed with the Non-Beveled Edge Flush with Flooring, or Where No Greater Than  $\frac{3}{4}$ " Vertical Rise Occurs*

*\*\* Designed for Thermal Break. Bumper Seal Not Available*



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO  $1\frac{1}{2}$  HOURS. CATEGORY J

**ngp.com**  
**1-800-NGP-RUSH**

FAX: (800) 255-7874

QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)

11.24


# THRESHOLD

---

# INSTALLATION INSTRUCTIONS

---

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.

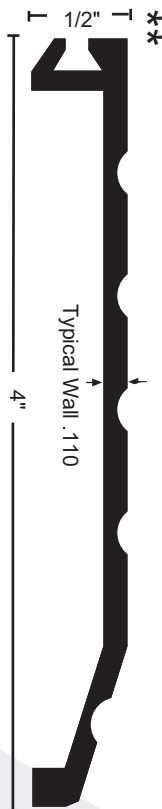

THE PRODUCTS  
**YOU COUNT ON**  
THE PEOPLE  
**YOU TRUST**  
**ngp.com**

FAX: (800) 255-7874  
QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)  
ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**  
3689 Arrowhead Drive  
Carson City, NV 89706